

RElift



MAKE THE DIFFERENCE



www.relift.in | Info@relift.in

SPIDER LIFT
RE22  + 

SPIDER LIFT
RE22HY  +  + 



STANDARD EQUIPMENT

Articulated with double telescopic booms

360° continuous turret rotation

±80° platform rotation

CAN-bus controlled

One-button outrigger leveling

Variable outrigger system

Radio remote control

Go home function

Track width adjusting system

White non-marking rubber tracks

Full proportional control system

Auto leveling platform

Emergency hand pump

Hour meter

Hydraulic safety devices

Platform overload sensor

Removable aluminium platform

Real-time data display in the control panel

Double speed drive

AC220V electric motor

Standard painting: RAL5021

AC220V electric socket in the platform

Storage box for the radio

Diesel engine

ACCESSORIES

4 Sliding Pads

Proportional valve emergency lever

AC220V power cable for electric motor

10m control cable for radio

2 batteries for radio

OPTIONS

Special painting

51.2-280AH Lithium-ion battery pack

Lithium battery + diesel engine (hybrid)

Black standard rubber tracks



Lifting device (260kg capacity)

Anti-collision kit for the platform

TECHNICAL PARAMETERS

RE22-22HY Spider Lift

Model	RE22-22HY
TECHNICAL DATA	
Working height	21.8 m
Platform height	19.8 m
Horizontal outreach	8.6 m
Up and over clearance	13.8 m
Negative working capacity	-2 m
Track width-adjustable	900mm / 1150mm
Total weight	3250 kg
A Platform (length)	1.5 m
B Platform (width)	0.7 m
C Platform (height)	1.1 m
D Stowed length	4975 mm
E Stowed length (without platform)	4530 mm
F Stowed width	1500 mm
G Stowed width (without platform)	900 mm
H Stowed height (min.)	1980 mm
I Length-outrigger footprint	3690mm / 4910 mm
J Width-outrigger footprint	2560mm / 3745 mm
K Track (length*width)	1425mm x 230mm
Standard painting	RAL 5021
PERFORMANCE	
Platform capacity	230 kg
Gradeability (max.)	30%
Travel speed (max.)	1.3 km/h
Platform rotatable	±80°
Turntable rotation	360° (continuous)
Live load in travelling position	4.35 kN/m2
Live load in working Position	2.35 kN/m2
Control	Radio remote control
POWER SOURCES	
Combustion engine (diesel)	Kubota D902 15.9kw
Electric motor	AC220V / 3kw
Lithium battery (pure electric)	51.2V-280AH (option)
Lithium battery (hybrid)	25.6V-280AH (option)

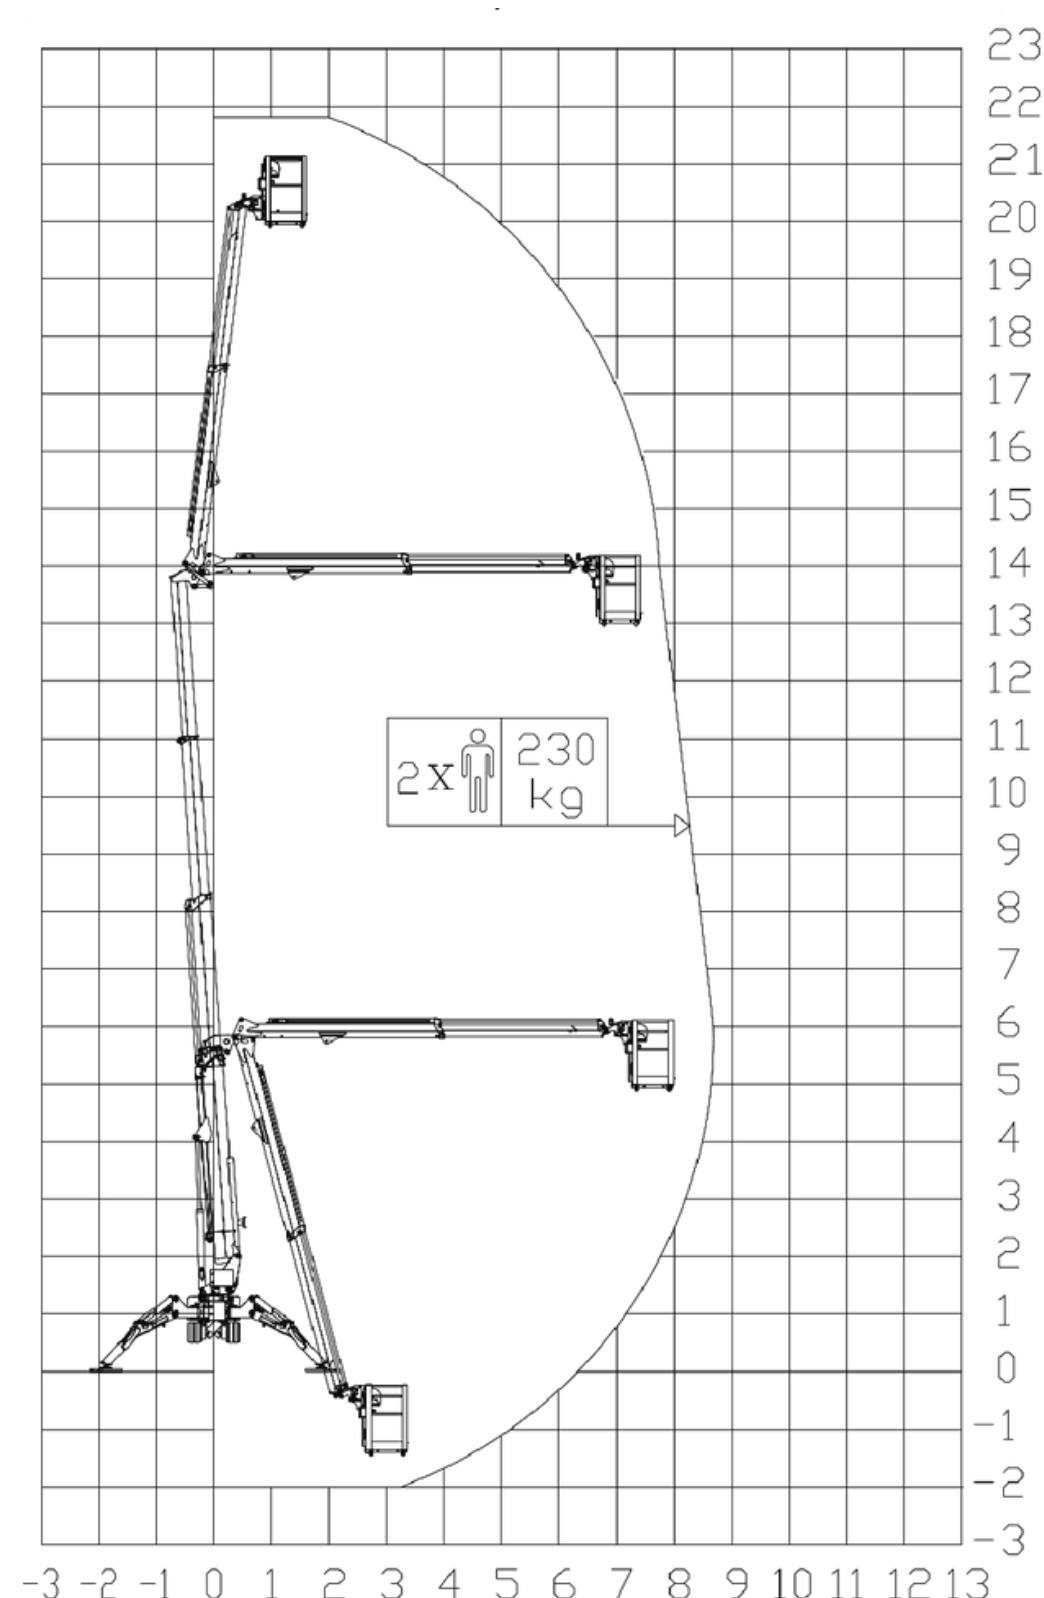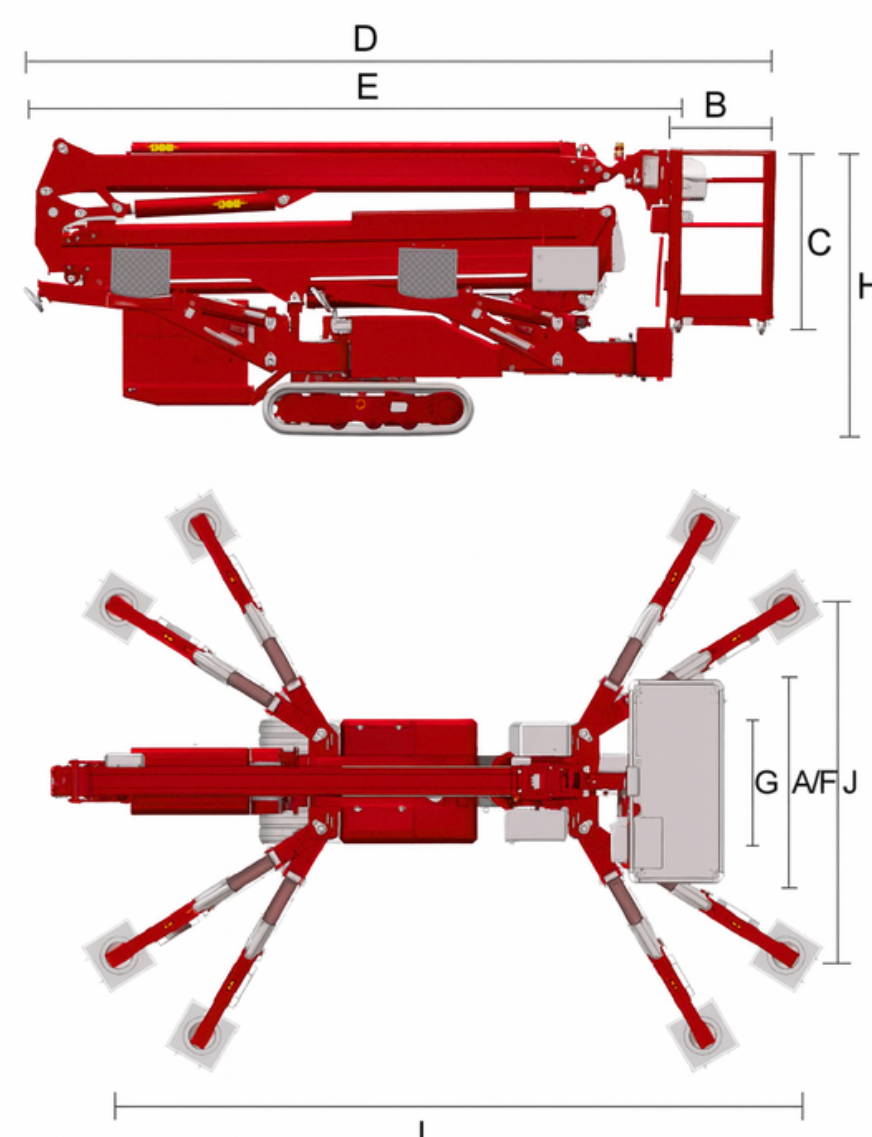

RElift

MAKE THE DIFFERENCE

HEADQUARTERS

Office No. 103, 104 Plan S Business Park, Plot no D 108/1, opp. D.Y.Patil Stadium, MIDC Industrial Area, Nerul, Navi Mumbai, Maharashtra 400705
Mobile : +91- 9900024623 | Tel :022 - 27747458



MEMBER OF

APAO

Aerial Platform Association of India

www.relift.in | Info@relift.in