

RElift



MAKE THE DIFFERENCE



www.relift.in | Info@relift.in

BOOM LIFT

RE29AJLi



STANDARD FEATURES

Hydraulic leveling platform

180* hydraulic rotation platform

Rear inspect and driving confirm

Three joysticks gradual proportional control

Horn and buzzer safety warnings

Flash light

Over load Sensor

5-inch super-scale colour screen

Diagnosis system

Emergency stop system

Emergency brake release

Emergency lowering system

Tilt alarm

4 wheel brake

Foam filled tire

Foot switch

Maximum tilt angle of 5°

Strong off-road capability

Long battery endurance

Compact structural design

Lithium power system

Environmentally friendly

Zero emission

Anti-extrusion device

Wide operating range

High torque drive

OPTIONS

Platform swing gate

Platform alternate railing

Hydraulic oil cooler

Hydraulic oil for extremely cold areas

Lifting device (260kg capacity)

Anti-collision kit for the platform




GPS

RElift

TECHNICAL PARAMETERS

RE29AJLi Boom Lift

Model	RE29AJ Li
TECHNICAL DATA	
Working height	28.6 m
Platform height	26.6 m
Outreach	16.7 m/18.8 m
Horizontal work amplitude	17.5 m/19.5 m
A Length (stowed)	11.4 m
B Width (stowed)	2.48 m
C Wheelbase	2.95 m
Ground clearance	0.3 m
Platform size (L*W*H)	2.43x0.9x1.1 m
Total Weight	13495 Kg
PERFORMANCE	
Lift Capacity	454 / 300 kg
Drive speed (stowed)	5 km/h
Drive speed (Raised)	1 km/h
Gradeability (4WD)	40 %
Turntable rotation position	360° Continuous
Platform rotation	180°
Turning radius	3.6/ 6.8 m
Turntable tailswing	2.4 m
Tire specification / Type	36 × 14- 20(solid trie)
POWER SOURCES	
Driving/Steering	4×2
Hydraulic tank	180 L
Battery	80V460AH (Lithium battery)
Charger	100-240V AC/80A

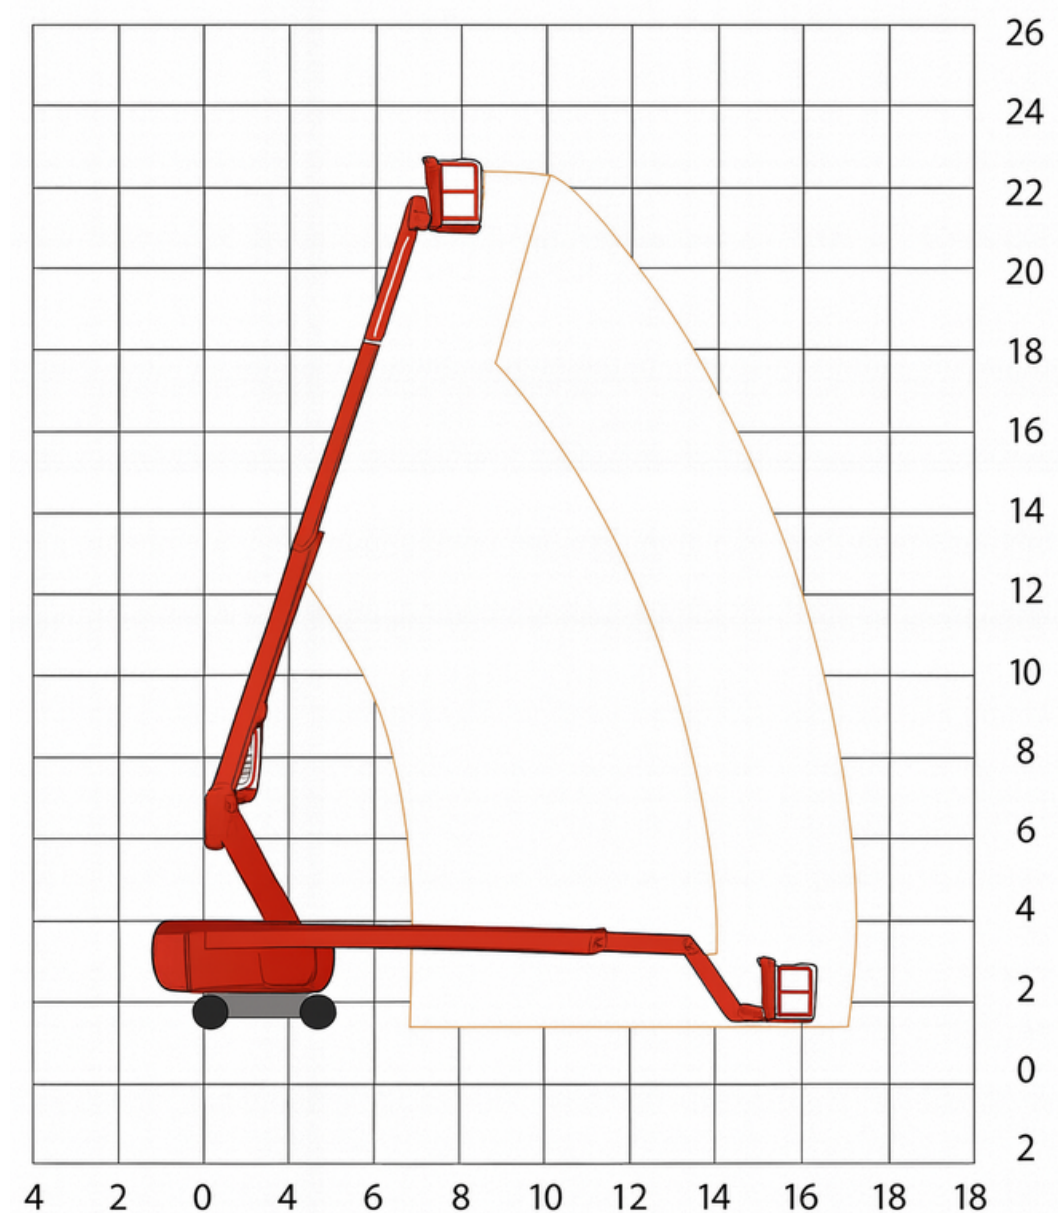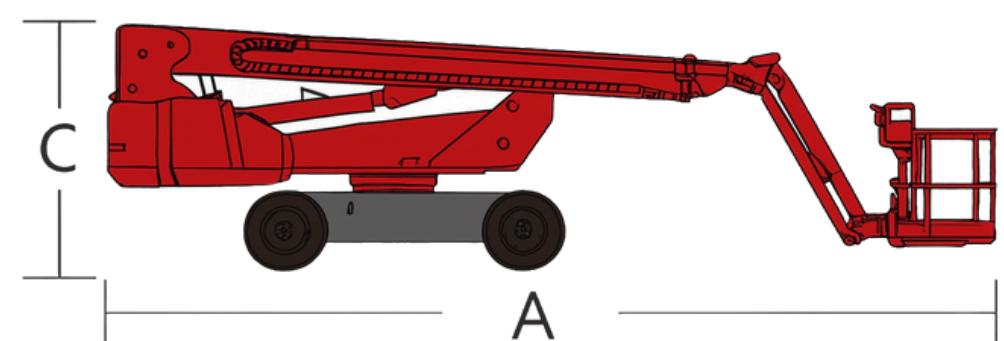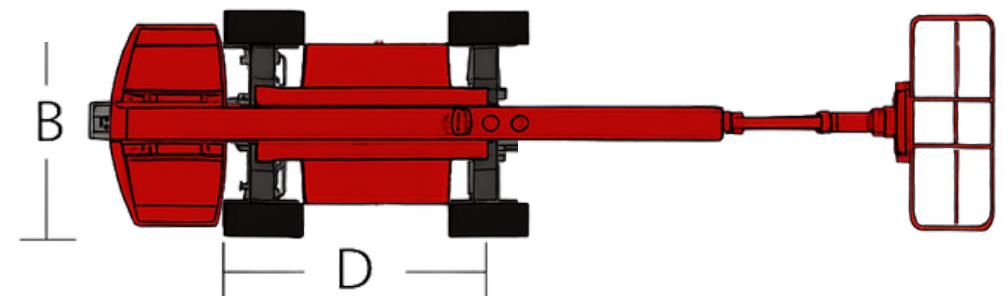

RElift

MAKE THE DIFFERENCE

HEADQUARTERS

Office No. 103, 104 Plan S Business Park, Plot no
D 108/1, opp. D.Y.Patil Stadium, MIDC Industrial
Area, Nerul, Navi Mumbai, Maharashtra 400705
Mobile : +91- 9900024623 | Tel :022 - 27747458



MEMBER OF

APAO

Aerial Platform Association of India

www.relift.in | Info@relift.in