

RElift



MAKE THE DIFFERENCE



www.relift.in Info@relift.in


Electric Forklift

- **REFT1630**
- **REFT2530**



STANDARD FEATURES

- Small Size
- Light Weight
- Compact Structure
- Narrow Passage Use
- High Lifting Capacity
- Heavy Load Handling
- Small Turning Radius
- Easy Maneuverability
- Buffer Lift Cylinder
- Smooth Descent Control
- Safe Cargo Lowering
- Throttle Control System
- Enhanced Operational Safety
- Adjustable Steering Wheel
- Adjustable Seat
- Ergonomic Design
- Operator Comfort
- Customizable Position
- Flexible Operation Setup
- New Headlight Design
- Durable Headlights
- Improved Visibility
- Night Work Safety
- Low-Light Operation

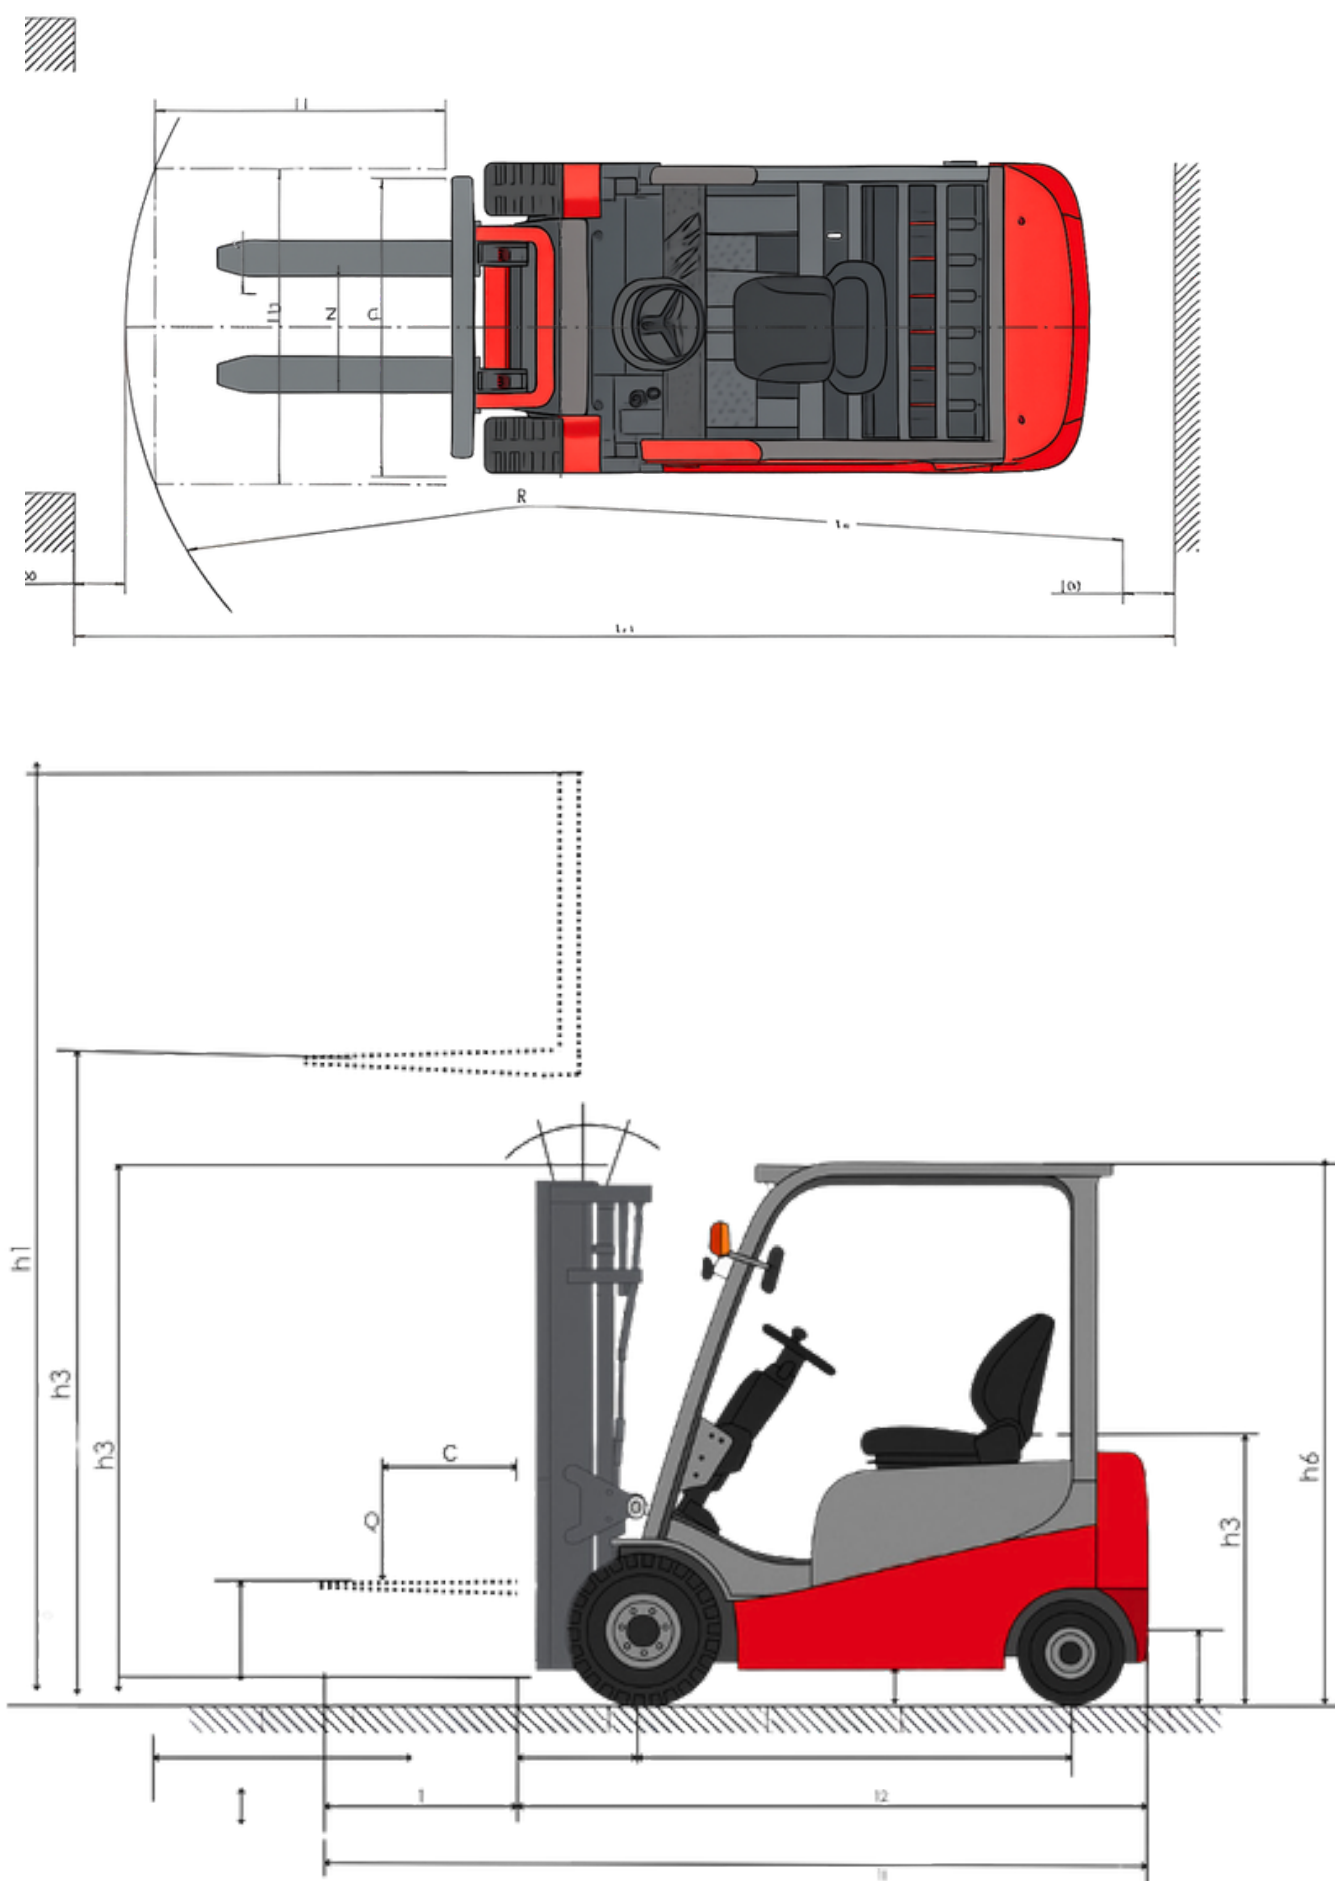

TECHNICAL PARAMETERS

REFT1630/2530

MODEL	REFT1630	REFT2530
TECHNICAL DATA		
Height of mast, lowered	2000 mm	2000 mm
Lift	3000 mm	3000 mm
Height of mast, extended	3815 mm	3996 mm
Height of overhead guard (cabin)	2198 mm	2165 mm
Height of seat/stand-on platform	1195 mm	1160 mm
Towing coupling height	352 mm	248 mm
Overall length	3120 mm	3475 mm
Length to fork face	2170 mm	2405 mm
Overall width	1080 mm	1194 mm
Fork dimensions	35 / 100 / 950 mm	40 / 120 / 1070 mm
Width of fork carriage	920 mm	1040 mm
Width of forks	115 mm	110 mm
Min. ground clearance	125 mm	128 mm
Aisle width with pallet 1000 × 1200 across forks	4190 mm	3958 mm
Aisle width with pallet 800 × 1200 along forks	4225 mm	4088 mm
Min. turning radius	2080 mm	2200 mm
Axle center to fork face	411 mm	488 mm
Track width	890 mm	973 mm
Wheel base	1410 mm	1518 mm
Service weight with battery	2750 kg	4230 kg
Rated traction weight	1600 kg	2500 kg
PERFORMANCE		
Travel speed, laden/unladen	12 / 13 km/h	13 / 15 km/h
Lifting speed, with/without load	250 / 400 mm/s	270 / 350 mm/s
Lowering speed, with/without load	240 / 258 mm/s	435 / 566 mm/s
Climbing ability, with/without load	12 / 15 %	15 / 16 %
Service brake	Hydraulic	Hydraulic
Drive motor, 60 minute rating	6.5 kW	11 kW
Lift motor rating at S3 15%	7 kW	12 kW
Battery voltage / rated capacity	48 / 385 V/Ah	48 / 560 V/Ah
Battery weight (±5%)	635 kg	930 kg
Type of drive control	AC	AC
type of steering	Hydraulic	Hydraulic



RElift

MAKE THE DIFFERENCE

HEADQUARTERS

Office No. 103, 104 Plan S Business Park, Plot no
D 108/1, opp. D.Y.Patil Stadium, MIDC Industrial
Area, Nerul, Navi Mumbai, Maharashtra 400705
Mobile : +91- 7456025602



MEMBER OF
APAO
Aerial Platform Association of India

www.relift.in | Info@relift.in