

RElift



MAKE THE DIFFERENCE





www.relift.in Info@relift.in

Electric Pallet Truck

- REPT20L
- REPT25L
- REPT30L



STANDARD FEATURES
Imported AC Controller
ZF Vertical Gearbox
Powerful AC Drive
Superior Acceleration
Energy Efficient
Ergonomic Handle
Easy Operation
Dual Balance Wheels
Enhanced Stability
Floor Protection
Utility Storage
User-Friendly Design
Stable Dual Balance Wheel System (115×55mm)
Reinforced Fork Construction
Durable Steel Chassis Frame
Enhanced Operator Comfort
5.5km/h Travel Speed
Electric Steering System
80×80mm Bearing Wheel
Adjustable Handle Height
2380mm Pallet Width Access
Designed for 24×7 Industrial Operations
1910mm Extended Body Length
High Strength Bearing Wheels

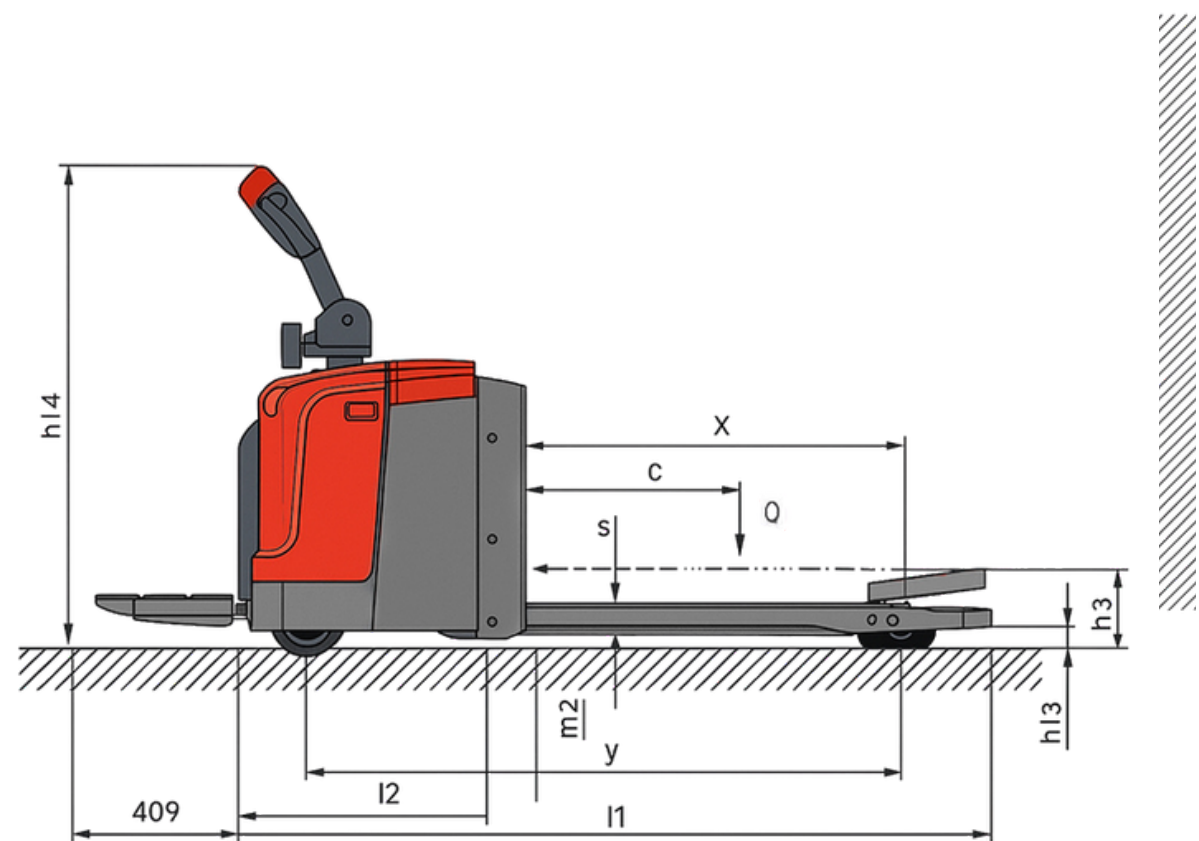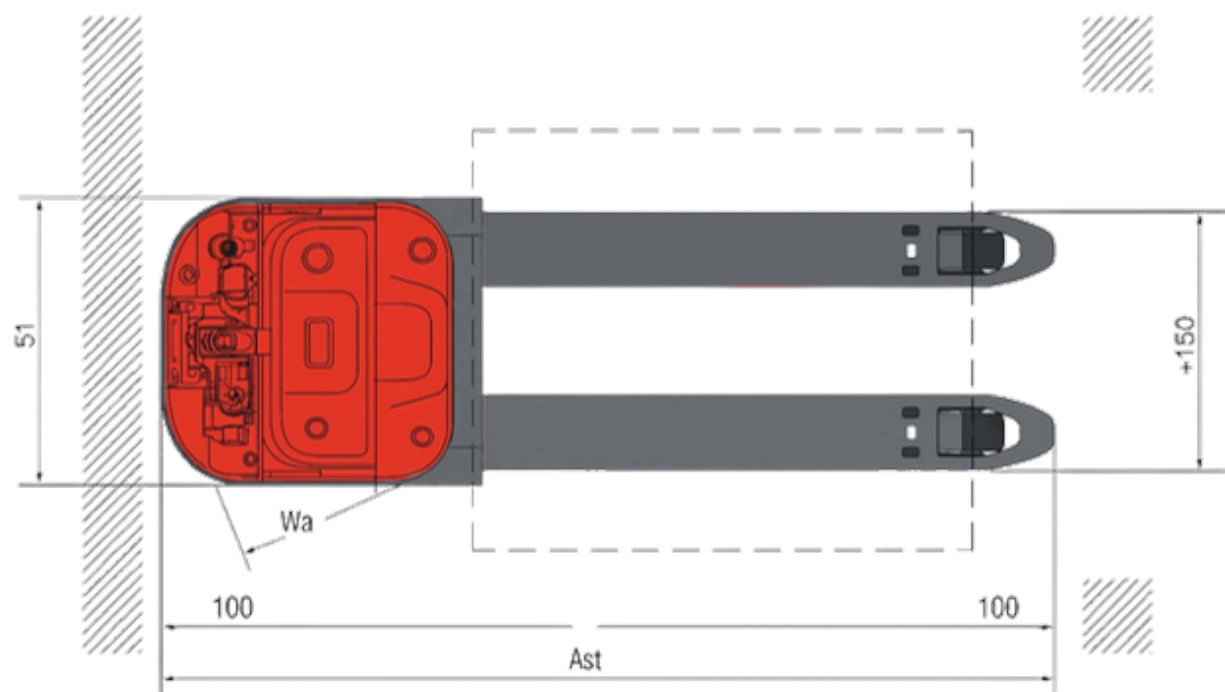

TECHNICAL PARAMETERS

REPT20/25/30 L

MODEL	REPT20L	REPT25L	REPT30L
TECHNICAL DATA			
Lift	200 mm	200 mm	200 mm
Overall height (With handle)	1150/1455 mm	1150/1455 mm	1150/1455 mm
Lowered length	85 mm	85 mm	85 mm
Overall length	1910 (1985) mm	1910 (1985) mm	1910 (1985) mm
Length to fork face	756 mm	756 mm	756 mm
Overall width	808 mm	808 mm	808 mm
Fork dimensions	50/185/1150 (1220) mm	50/185/1150 (1220) mm	50/185/1150 (1220) mm
Width of forks	540/685 mm	540/685 mm	540/685 mm
Min. ground clearance	25mm	25mm	25mm
Aisle width with pallet 1000 × 1200 across forks	2180 mm	2180 mm	2180 mm
Aisle width with pallet 800 × 1200 along forks	2380 mm	2380 mm	2380 mm
Min. turning radius	1746 mm	1746 mm	1746 mm
Axle center to fork face	1039 mm	1039 mm	1039 mm
Track width	580 mm	580 mm	580 mm
Wheel base	1560 mm	1560 mm	1560 mm
Service weight with battery	735 kg	750 kg	756 kg
Rated Traction Weight	2000 kg	2500 kg	3000 kg
Load centre	600 mm	600 mm	600 mm
PERFORMANCE			
Travel speed, laden/unladen	5.2 / 5.5 km/h	5.2 / 5.5 km/h	5.2 / 5.5 km/h
Lifting speed, with/without load	22 / 28 mm	18 / 20 mm	15 / 18 mm
Lowering speed, with/without load	30 / 20 mm	32 / 18 mm	35 / 16 mm
Service brake	Electromagnetic	Electromagnetic	Electromagnetic
Driver motor, 60 minute rating	1.5 kW	2.5 kW	3.0 kW
Lift motor rating at S3 15%	0.8 kW	2.2 kW	2.2 kW
Battery voltage / rated capacity	24 / 210 V/Ah	24 / 210 V/Ah	24 / 210 V/Ah
Battery weight	190 kg	190 kg	190 kg
Type of drive control	AC	AC	AC
Noise level at operator	70 dB(A)	70 dB(A)	70 dB(A)
Type steering	Electric	Electric	Electric



RElift

MAKE THE DIFFERENCE

HEADQUARTERS

Office No. 103, 104 Plan S Business Park, Plot no
D 108/1, opp. D.Y.Patil Stadium, MIDC Industrial
Area, Nerul, Navi Mumbai, Maharashtra 400705
Mobile : +91- 7456025602



MEMBER OF
APAO
Aerial Platform Association of India

www.relift.in | Info@relift.in