

RElift



MAKE THE DIFFERENCE





www.relift.in Info@relift.in

Electric Pallet Truck

- REPT15S
- REPT20S



STANDARD FEATURES
Compact Design
Lightweight Build
Small Turning Radius
Elevator-Compatible
Low Noise Operation
Strong Frame
Open Structure
Easy Maintenance
Quick Battery Swap
Extended Working Time
Anti-Collision Switch
Dual Braking System
Ergonomic Handle
Electric Lifting
Manual Descent Control
Adjustable Descent Speed
Protective Metal Cover
Motor & Wheel Guard
Operator Foot Safety
35 mm Ground Clearance Design
Precision Electric Lift Control
Operator-Friendly Step Platform
High-Efficiency DC Motor
Heavy-Duty Load Forks

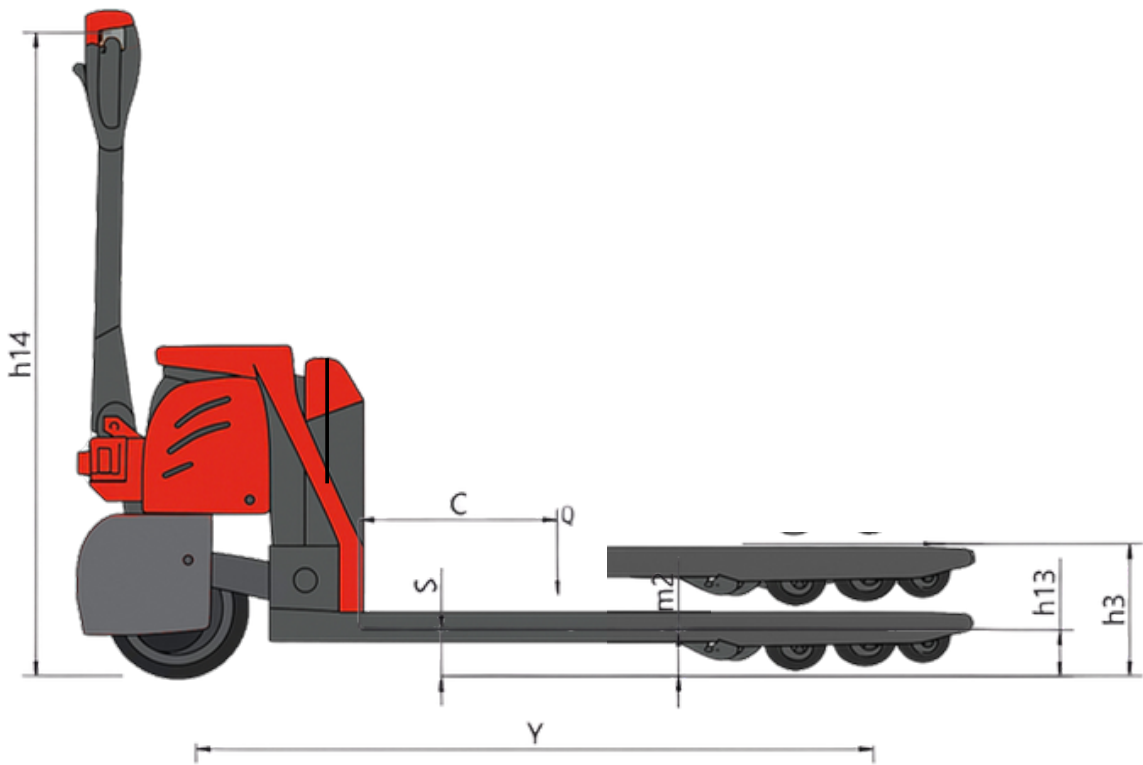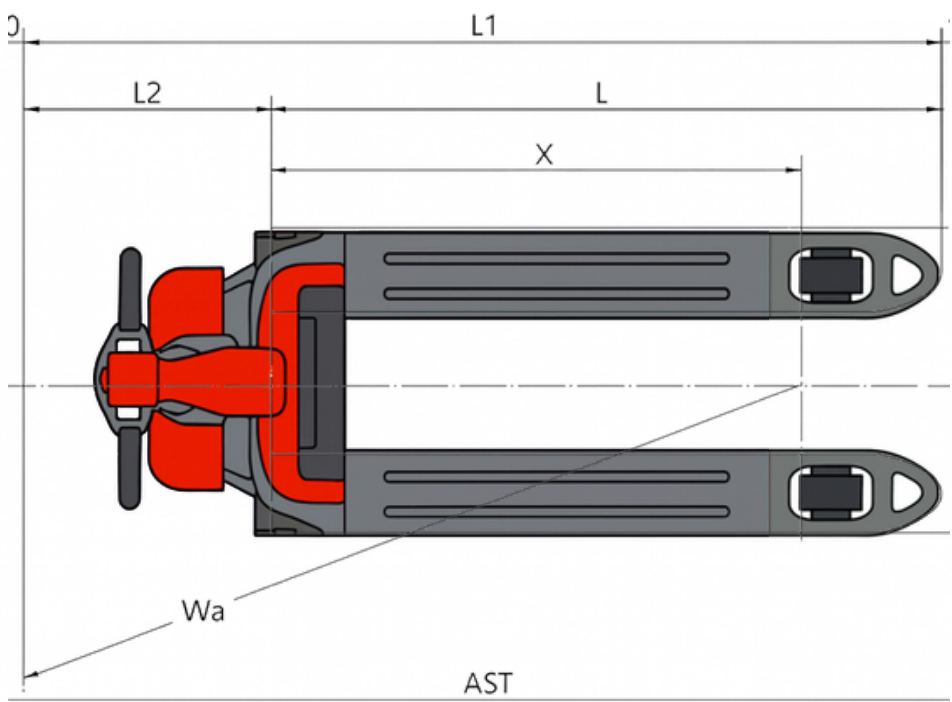

TECHNICAL PARAMETERS

REPT15/20 S

MODEL	REPT15S	REPT20S
TECHNICAL DATA		
Lift	200 mm	200 mm
Overall height (With handle)	740 / 1160 mm	740 / 1160 mm
Lowered length	85 mm	85 mm
Overall length	1603 mm	1603 mm
Length to fork face	453 mm	453 mm
Overall width	550 / 685 mm	550 / 685 mm
Fork dimensions	50 / 150 / 1150 mm	50 / 150 / 1150 mm
Width of forks	550 / 685 mm	550 / 685 mm
Min. ground clearance	35 mm	35 mm
Aisle width with pallet 1000 × 1200 across forks	1804 mm	1804 mm
Aisle width with pallet 800 × 1200 along forks	1854 mm	1854 mm
Min turning radius	1398 mm	1398 mm
Axle center to fork face	944 mm	944 mm
Track width	400 / 535 mm	400 / 535 mm
Wheel base	1243 mm	1243 mm
Service weight with battery	142 kg	146 kg
Rated Traction Weight	1500 kg	2000 kg
Load centre	600 mm	600 mm
PERFORMANCE		
Travel speed, laden/unladen	4.2 / 4.5 km/h	4.2 / 4.5 km/h
Maximum climbing ability, with/without	5 / 10 km/h	5 / 10 km/h
Service brake	Electromagnetic	Electromagnetic
Driver motor, 60 minute rating	0.75 kW	0.75 kW
Lift motor rating at S3 15%	0.5 kW	0.8 kW
Battery voltage / rated capacity	20/24, 24/30, 24/40 V/Ah	24/60, 48/20, 48/30 V/Ah
Battery weight	6, 8.2, 10.2 kg	13.2, 10.2, 13.2 kg
Type of drive control	DC	DC
Noise level at operator	≤70 dB(A)	≤70 dB(A)
Type steering	Mechanical	Mechanical



RElift

MAKE THE DIFFERENCE

HEADQUARTERS

Office No. 103, 104 Plan S Business Park, Plot no
D 108/1, opp. D.Y.Patil Stadium, MIDC Industrial
Area, Nerul, Navi Mumbai, Maharashtra 400705
Mobile : +91- 7456025602



MEMBER OF
APAO
Aerial Platform Association of India

www.relift.in | Info@relift.in